

IMPORTANT INFORMATION

Assembly


Do NOT take barrel off without taking piston packing apart first.
Assemble packing while barrel is attached to handle.

Loading


Completely retract rod, then insert sausage.

If the sausage will not fit in the barrel easily:

1. Pull rod approximately 1/3 of the way back.
2. Insert sausage. It should reach the piston.
3. Tilt the tool upwards.
4. Pull the rod all the way back. The sausage should follow.

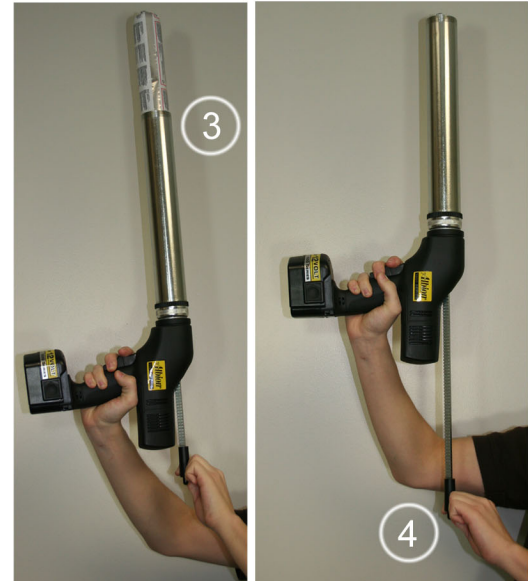

800-G01/800-G02

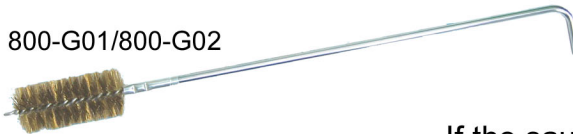

A barrel brush like the 800-G01 or 800-G02 is useful for cleaning cured material in the barrel.

Problems

Occasionally sausage rupture or pinching may occur.
If this happens, the rack and barrel must be cleaned.

If the sausage gets pinched by the piston, a new one will be needed.

Albion Customer Service is here for you.

We would like to hear the problem. (856) 235-6688



ALBION Engineering Co.
1250 N. Church Street
Moorestown, NJ 08057-1102
856-235-6688

www.albioneng.com

FAX TOLL-FREE: 800-841-7132
(USA, Canada, Puerto Rico
& US Virgin Islands)

INTERNATIONAL FAX: 001-856-235-9460
E-MAIL: service@albioneng.com