

INSTALL BACKER ROD QUICKLY IN HORIZONTAL JOINTS

Bulletin 367D

The Best Just Keeps Gettin' Better!®

✓Bulk

✓Sausage

✓Cartridge

✓Multi-Component

✓Accessories



"A more consistent backer rod depth can directly translate into a more consistent caulking bead. With improved craftsmanship and faster completion rates you can be hired more frequently and have a reputation for quality in your caulking and sealing trade."


- Satisfied User

MUST SEE VIDEO AT
<https://youtu.be/UikR7fISQMw>




ROVER BACKER ROD INSTALLER (p/n 1051-1)

- Quickly sets polyethylene foam backer rod in horizontal saw cut and expansion joints directly from a spool.
- For joints from 1/8" to 1/2" wide (1/8" - 5/8" rod). (Contact us for larger joints)
- Second backer rod guide tube included for 5/8" to 1" diameter rod. (1059-G10)
- Unit ships with 1/8" (0.070") and 3/8" (0.375") wide insertion wheels.
- 1/4" (0.20") and 1/2" (0.45") are also available
- Insertion depth is adjustable from 0" - 3/4".
- Sturdy all-steel construction. Packaged in a durable storage case.
- Use an 640-series backer rod insertion tool for entry and exit points made with the Rover. *Kits sold separately
- Holds spools up to 17" wide. For wider spools up to 31" purchase Spool Extension Kit 1074-1. *Kit sold separately

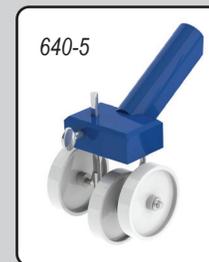

Use an 640-series backer rod insertion tool for entry and exit points made with the Rover.

*Kits sold separately

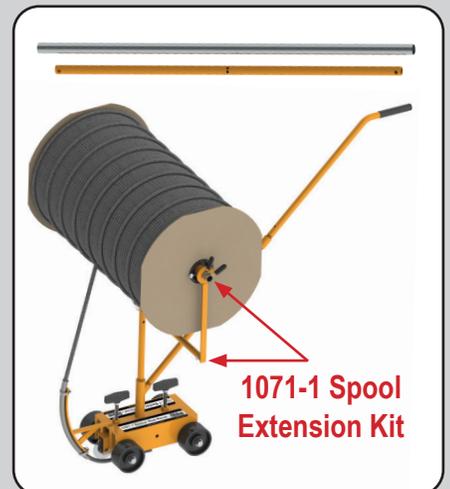

For Spools up to 31" wide.
*Kit sold separately



1250 N Church St., Moorestown, NJ 08057 | 856.235.6688 | Service@albioneng.com | www.albioneng.com

202301